

First Team Sports, Inc.

Ring & Lid for Floating Floors

Installation Instructions

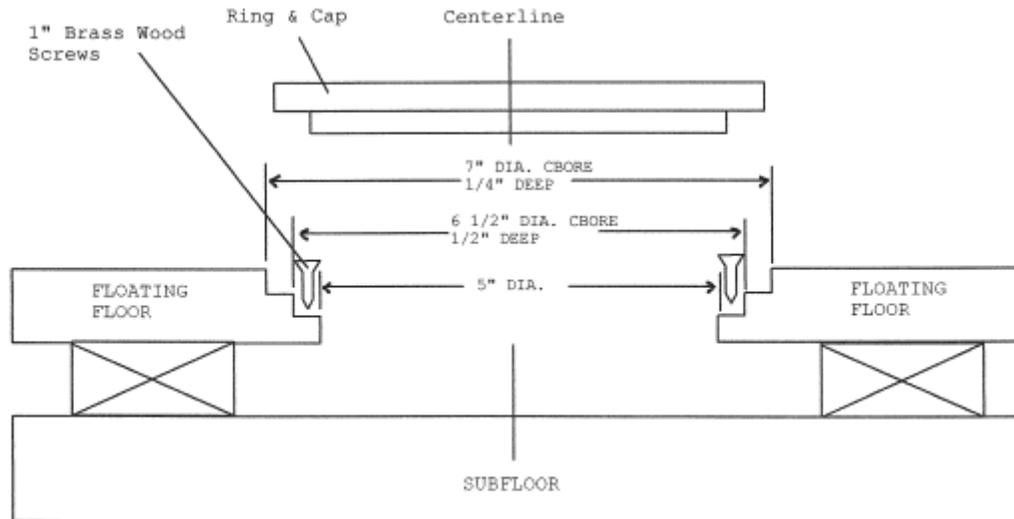


FIGURE A

Bill of Materials

- A (1) 7" Brass Ring
- B (1) 6" Brass Cap
- C (4) 1" Brass Wood Screw

NOTE: Immediately unpack all components and cross check against bill of materials. Report any shortages to First Team customer service at 1-888-884-6677.

RING AND CAP INSTALLATION ON TYPICAL GROUND LEVEL FLOATING WOOD FLOORS

Locate Cap centerlines on floor based upon your equipment and application.

Drill 5" diameter hole through floating floor. Counterbore a 6 1/2" diameter hole 1/2" deep and a 7" diameter hole 1/4" deep.

Using the (4) 1" brass wood screws provided, install top ring and cap as shown in Figure .

