


First Team Sports, Inc.


Teammate Portable Player Bench with Backrest General Assembly Instructions

Diagram A.

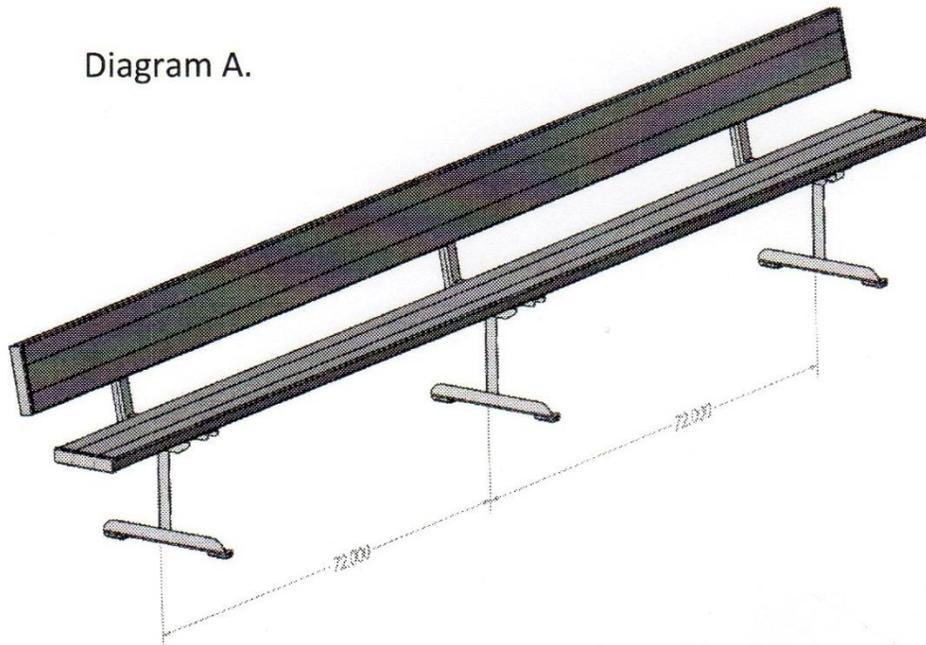

PLEASE NOTE: This assembly diagram is for general reference purposes only. Your bench configuration may differ from the one shown above.

1. Secure 2 rubber foot pads to the bottom of each bench leg using the #10x1" Philips machine screws, flat washers, lock washers and hex nuts provided.
2. Lay seat plank face down on a working tabletop surface
3. Using the pressure clamps, 3/8"x2" carriage bolts and hardware provided, loosely secure each leg and backrest support to the seat plank as shown in diagrams A and B. Backrest supports are the "L" shaped pieces. Backrest supports can be mounted on either side of the leg. The backrest plank secures to the portion with "BR" cut into it as shown on the following diagram.

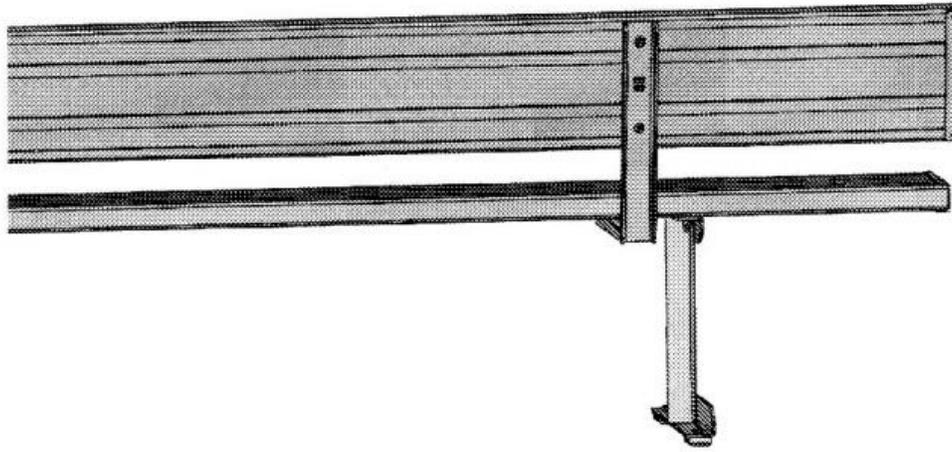


4. Space legs and backrests appropriately. Legs should be spaced on 72" centers with approx. 18" of seat plank outside the outermost legs. (The number of legs and backrest supports you receive will be based on the length of your bench)
5. Be sure pressure clamps are positioned properly and tighten. **PROPER PRESSURE CLAMP POSITIONING IS CRUCIAL TO THE OVERALL STRENGTH OF THE ASSEMBLY. MAKE SURE PRESSURE CLAMPS ARE CENTERED AND SQUARE, AS IN THE ILLUSTRATION IN DIAGRAM B.**
6. When all bench legs and backrest supports are spaced properly and secured adequately, turn player bench upright and set on ground.
7. Following the procedures described above, secure backrest plank to backrest supports.

Assembly of your Teammate player bench with backrest is complete.

FIRST TEAM SPORTS, INC
SEATPLANK ATTACHMENT DIAGRAM

DIAGRAM B

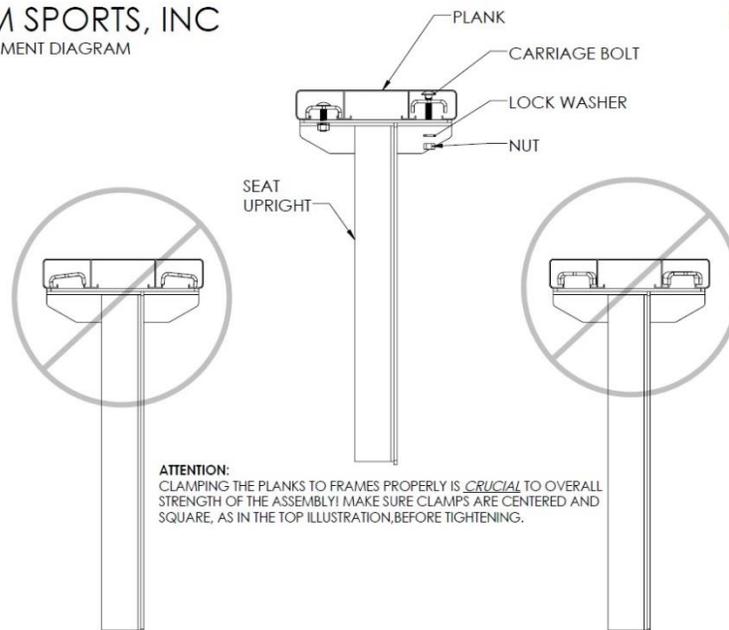

ATTENTION:
CLAMPING THE PLANKS TO FRAMES PROPERLY IS *CRUCIAL* TO OVERALL STRENGTH OF THE ASSEMBLY! MAKE SURE CLAMPS ARE CENTERED AND SQUARE, AS IN THE TOP ILLUSTRATION, BEFORE TIGHTENING.