

First Team Sports, Inc.

Teammate Fixed Player Bench with Backrest General Assembly & Installation Instructions

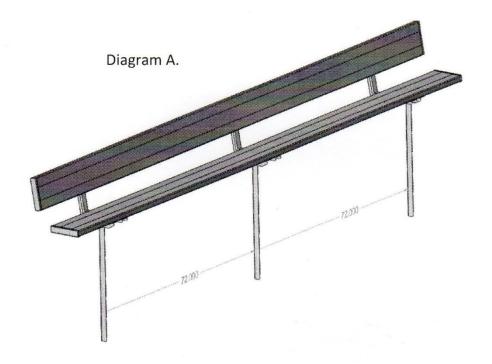


PLEASE NOTE: This assembly diagram is for general reference purposes only. Your bench configuration may differ from the one shown above.

- 1. Lay seat plank face down on a working tabletop surface
- 2. Using the pressure clamps, 3/8"x2" carriage bolts and hardware provided, loosely secure each leg and backrest support to the seat plank as shown in diagrams A and B. Backrest supports are the "L" shaped pieces. Backrest supports can be mounted on either side of the leg. The backrest plank secures to the portion with "BR" cut into it as shown on the following diagram.

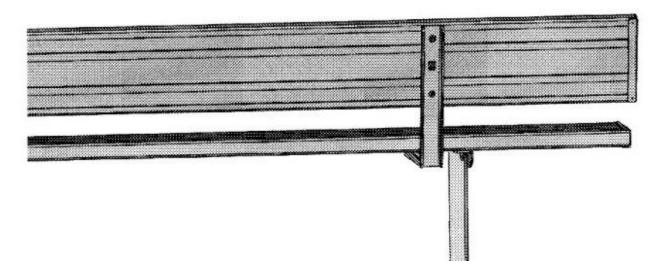

- 3. Space legs and backrests appropriately. Legs should be spaced on 72" centers with approx. 18" of seat plank outside the outermost legs. (The number of legs and backrest supports you receive will be based on the length of your bench)
- 4. Be sure pressure clamps are positioned properly and tighten. PROPER PRESSURE CLAMP POSITIONING IS CRUCIAL TO THE OVERALL STRENGTH OF THE ASSEMBLY. MAKE SURE PRESSURE CLAMPS ARE CENTERED AND SQUARE, AS IN THE ILLUSTRATION IN DIAGRAM B.
- 5. When all bench legs and backrest supports are spaced properly and secured adequately, move the bench to an upright position and proceed to step 6.
- 6. Following the procedures described above, secure backrest plank to backrest supports.
- 7. Determine proper location for bench installation.
- 8. When bench location has been determined, mark the location of each bench leg and dig a 20" deep hole at each spot. Each hole should be a minimum of 6"-8" in diameter.
- 9. Fill each hole with concrete and insert bench legs into footing holes.
- 10. Brace bench so bench is sitting straight and plumb with seat plank approximately 17" above ground level.
- 11. Let concrete cure for a minimum of 7 days before use.

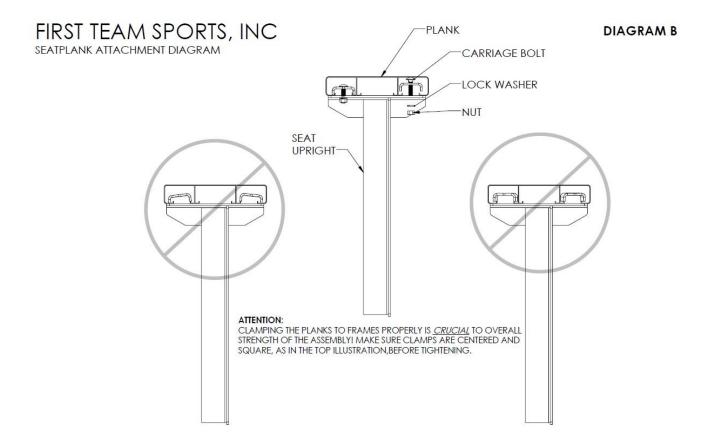

First Team Sports, Inc. * 902 Corey Road * Hutchinson, KS 67501 * 1-888-884-6677