



First Team FT5005 Replacement Volleyball Winch

3.5" UPRIGHT

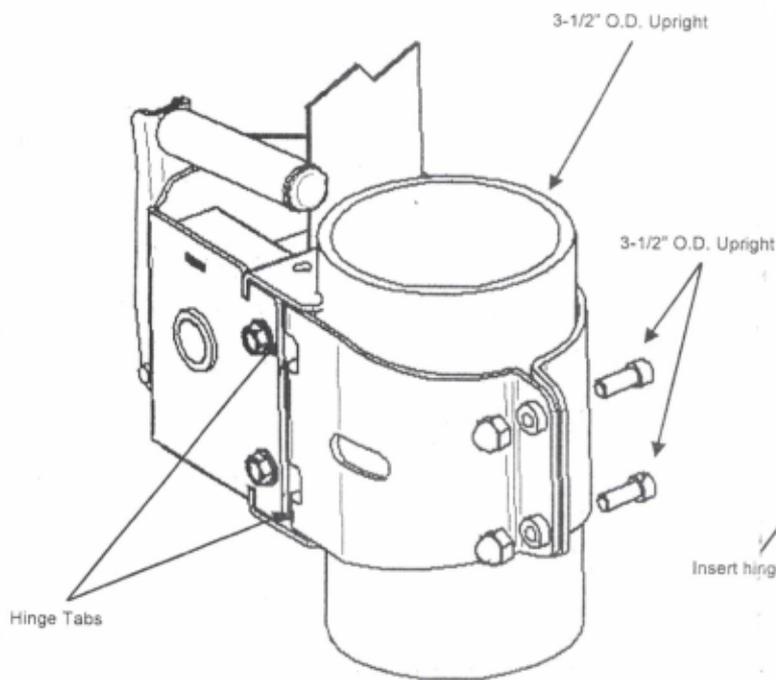

3" UPRIGHT

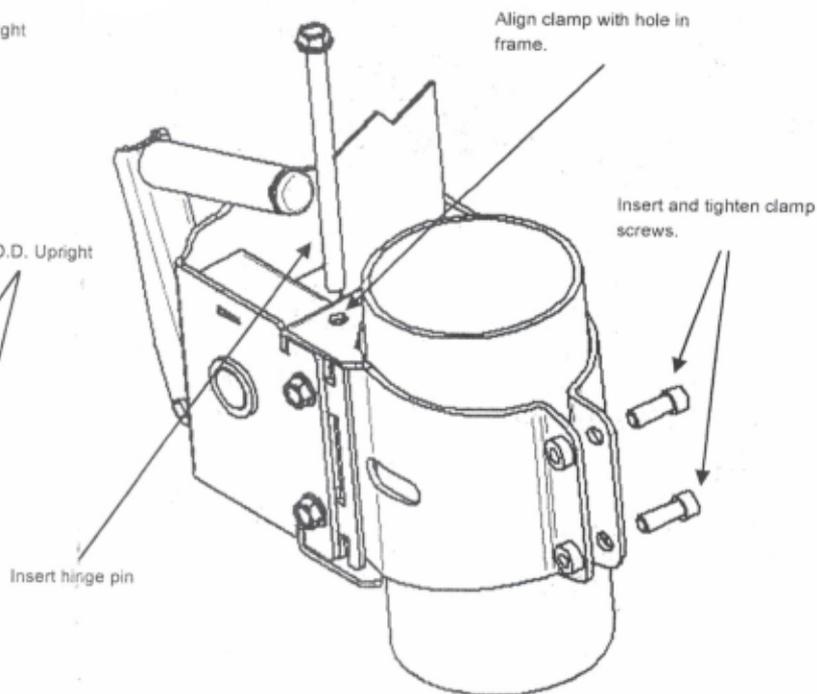

Slip the hinge tabs on the clamps into the winch slots on the winch housing.

Open the clamps and place the winch onto the uprights.

Align slot in clamp bracket with mounting holes on the upright.

Insert the clamp screws through the hole in the on clamp and then into the round nut in the other clamp.

Align one of the clamps with the hole in the winch, as shown.

Insert one of the 1/4" hinge pin bolts through the winch frame and through the U bend in the clamp.

Install and tighten the nylock nut onto the hinge pin.

Note: Fit the winch up to the pipe and then install the second clamp in the same manner.

****Note:** Please Make sure that once the unit is installed the strap is tensioned by rotating the handle clockwise (see nameplate on winch for tension direction). This will mean that the strap is exiting the spool of the FT5005 closest to the volleyball post that it is mounted to (see Figure 1 to the right for illustration). Failure to do this will result in premature wear and void the warranty.

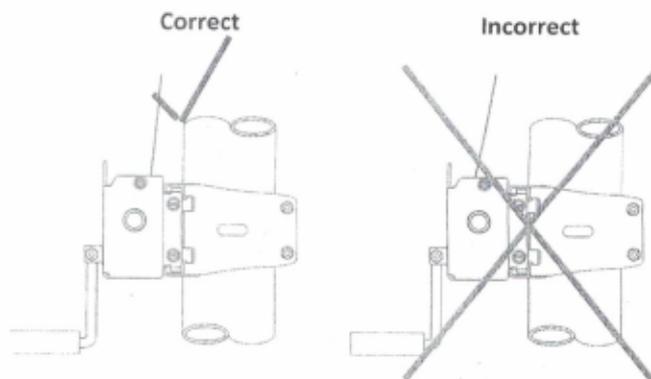


Figure 1

**First Team Sports, Inc.
902 Corey Rd.
Hutchinson, KS 67501
TOLL FREE: 888-884-6677**